
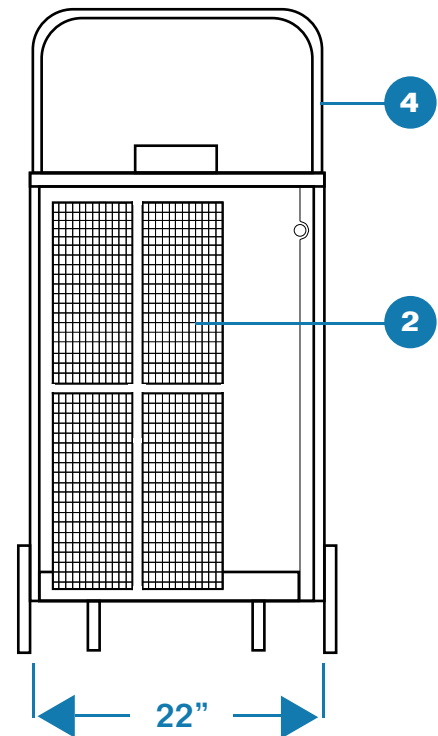
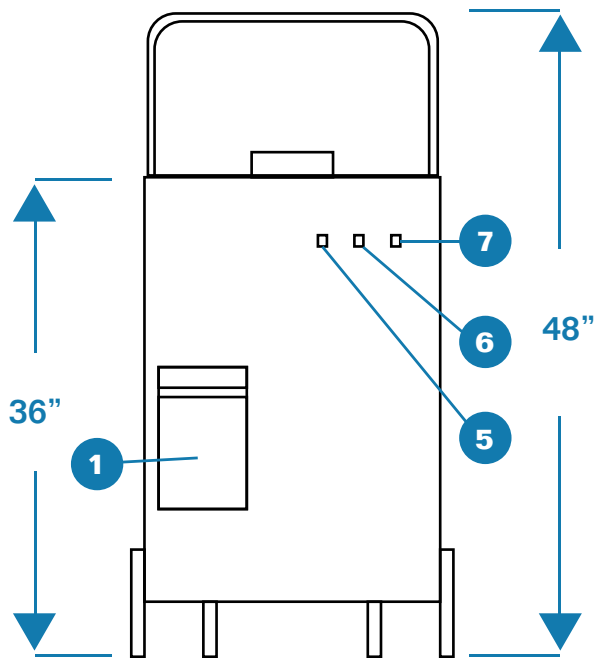
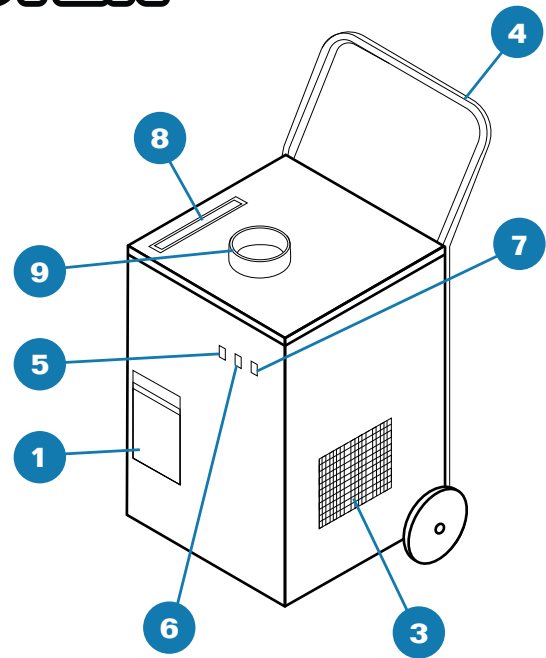


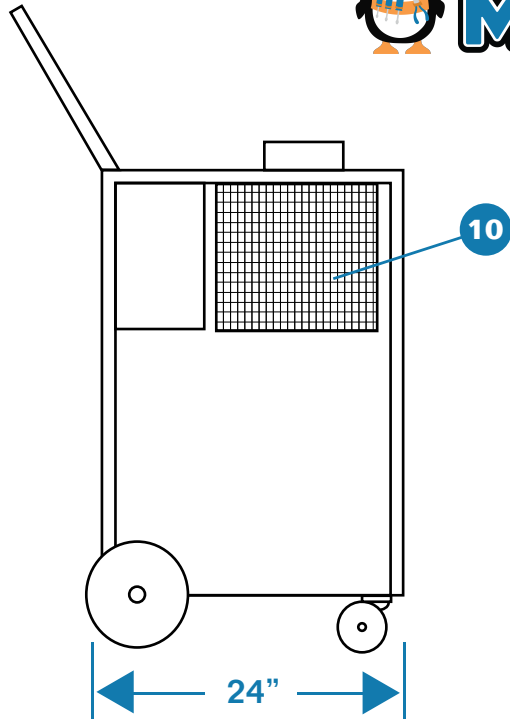

KAM1411

LEGEND

- | | |
|------------------------------------|---------------------------------|
| 1. Condenser Tank Access Door | 6. 2 Position Fan/Cooler Switch |
| 2. Condenser Air Intake Grill | 7. 2 Position High/Off Switch |
| 3. Condenser Hot Air Exhaust Grill | 8. Air Filter Slot |
| 4. 1" Handle | 9. Cold Air Supply Flange |
| 5. 2 Position On/Off Switch | 10. Return Air Grill |

CAPACITY

BTU/hr @95 F at 60%RH 13,700 / 1.1 Ton

COMPRESSOR

Compressor Type Hermetic Rotary
Operating Cooling Temp 60-110°F 50% RH
Non-CFC Refrigerant 410A

EVAPORATOR FAN

Fan Type (Centrifugal) Direct Drive
Air Flow (CFM) 600-30' / 450-90'
Supply Air Chute Data (Optional) 2 - 6" dia x 30" length

CONDENSER FAN

Fan Type (Centrifugal) Direct Drive
Air Flow (CFM) 950

ELECTRICAL

Power Supply (Volts) 115 V / Single Phase
Current Consumption (Amps) 12.9
Power Consumption (kW) 1.34
Maximum Circuit Breaker (Amps) 20
Recommended Breaker Size 15
Minimum Circuit Ampacity (Amps) 14.725
Min/Max Voltage 105 - 125
Power Cord Gauge / Length in Feet 12 AWG / 50'
Plug Configuration NEMA 5 - 15

DIMENSIONAL

Width x Length x Height (inches) 22" x 24" x 48"
Weight (lbs) 278
Shipping Weight (lbs) 328

SAFETY DEVICE

Compressor Overload External
Fan Motor Overload Automatic Internal
Evaporator Freeze-up Optional Freeze Stat
High Pressure Switch Manual
Compressor Short Cycle Yes
Automatic Restart Yes
Condensate Pump Safety Cut-off Optional
Condensate Tank Overflow Yes
Thermostat Type Digital Microprocessor