



48-Inch Thermo Griddle ♦ MCCTG48A



Standard Features

- ♦ 136,000/120,000 BTU output
- ♦ 48.0" W x 24.0" D x 1" thick griddle plate
- ♦ Stainless Steel U-Shaped Burner
- ♦ Bullnose edge
- ♦ Easy to clean grease trap
- ♦ Heavy Duty Chrome Plated comfort grip knobs
- ♦ Embedded temperature probe for more accurate cooking and better performance
- ♦ Propane gas conversion kit included

Exterior Features

- ♦ Stainless steel body and legs
- ♦ 6" Adjustable legs

Certified Safety Standard

- ♦ ETL Certified
- ♦ ETL Sanitation Listed




Warranty Information

- ♦ One year on-site Parts and Labor







48-Inch Thermo Griddle ♦ MCCTG48A

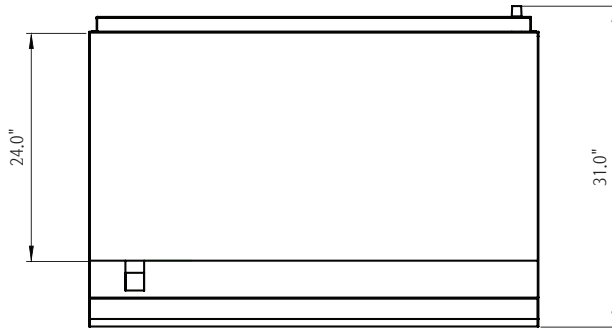

Top View

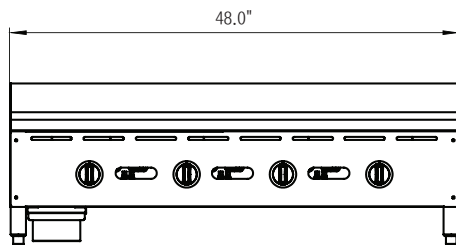

Front View

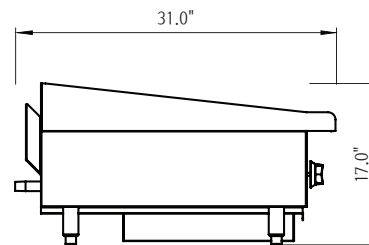

Side View

Model		MCCTG48A	Propane Conversion
Gas Output	BTU	136,000	120,000
	(kWh)	39.9	35.2
Number of Burners		4	4
Shipping Weight (Lbs)		485.1	485.1
Manifold Pressure	Natural Gas	4" W.C.	-
	Propane Gas	-	10" W.C.
Manifold Size		3/4"	3/4"
Burner Orifice Size		35/2.80mm	52/1.60mm
Cooking Area (Sq. In.)		1140	1140
Dimensions (W x D x H)		48.0" x 31.0" x 17.0"	48.0" x 31.0" x 17.0"
Crated Dimensions (W x D x H)		52.8" x 37.8" x 20.5"	52.8" x 37.8" x 20.5"

Clearance requirements:

- For use only on non-combustible floors.
- Legs or casters are required for non-combustible floors.

Clearance requirements	Combustible Surfaces	Non-combustible Surfaces
Rear	6" ~ 8"	0"
Left	6" ~ 8"	0"
Right	6" ~ 8"	0"

Options and accessories