

THIS FIXTURE WEIGHS OVER 50 LBS.

0700 4/4/2016

NEC:314.27B, A luminaire that weighs more than 23kg (50lbs.) shall be supported independently of the outlet box unless the outlet box is listed AND MARKED for the MAXIMUM WEIGHT to be supported.

ASSEMBLY INSTRUCTIONS FOR #177272

IMPORTANT

TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

CAREFULLY UNPACK AND IDENTIFY ALL PARTS BEFORE ASSEMBLY. BULBS ARE NOT INCLUDED

- 1.) Transfer your canopy hole pattern onto your ceiling, to accommodate the hanger bolts. Drive your hanger bolts into ceiling and into appropriate material to hold fixture. (Fig.1)
- 2.) Run your electrical wires up through threaded rod. Screw threaded rod into the coupler located on top of each shade. Slide your sleeve down onto the threaded rod, so the sleeve rests within the check ring. (Fig.2) Cap off the rod & sleeve with another check ring. (Fig.5) Send wires & then threaded rod through canopy. Secure to canopy with a spider washer and a nut. (Fig.3) Repeat this step for the other two shades. You may attach diffusers (step 4) before or after step 2 or 3.
- 3.) Raise fixture to ceiling, connect all electrical wires as per your local codes. Slide canopy up onto the hanger bolts, and secure flush to ceiling with acorn nuts provided.
- 4.) All shades should now be attached. Screw downrods into the undersides of light clusters. Slide diffuser up onto the lower part of down rod. Diffuser should rest on top of small white pegs pointing inward on the bottom of each shade. Secure diffuser by screwing finial onto downrod. (Fig.4)
- 5.) Bulb your fixture, (bulbs not included). Power on, enjoy your new fixture!

Fig.1

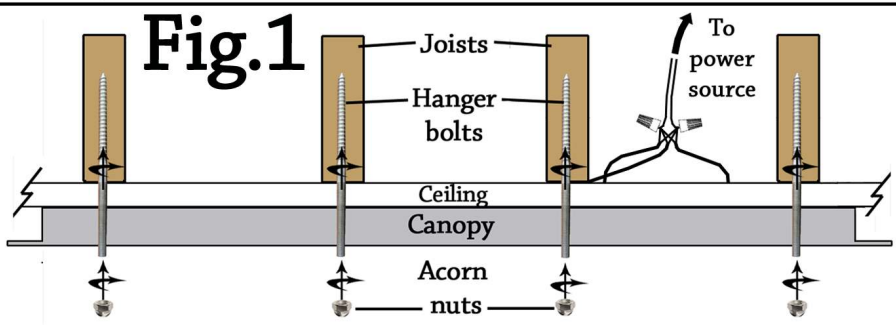


Fig.2

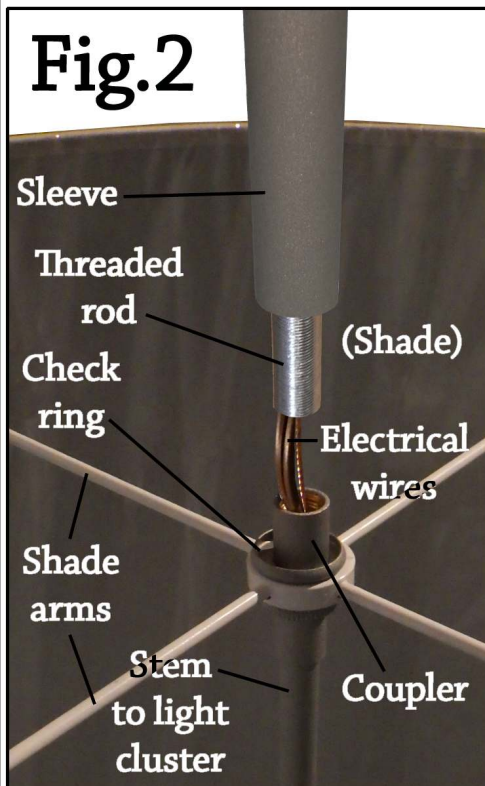


Fig.3

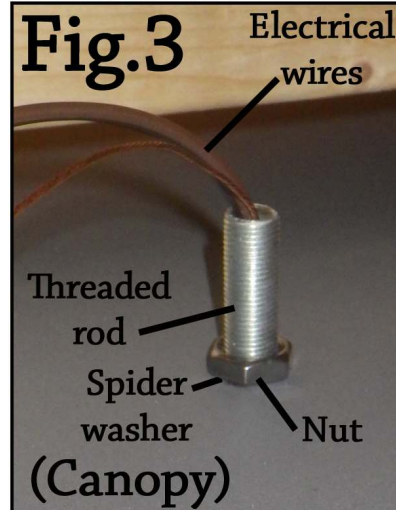


Fig.4

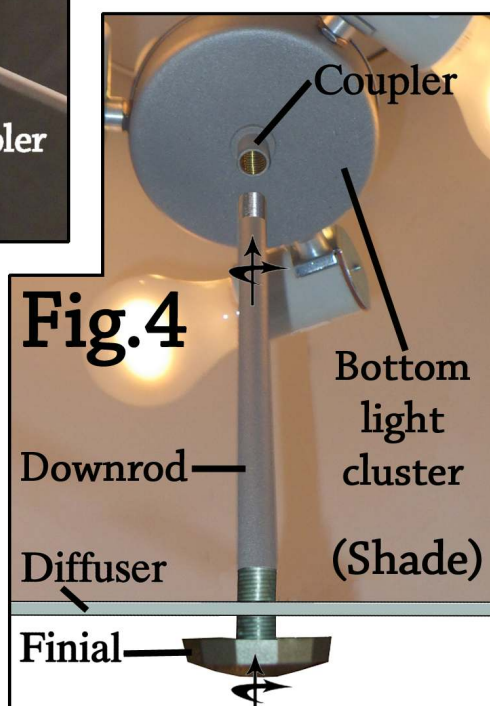


Fig.5



"A Commitment to Excellence in Lighting and Service"

CALL OUR CUSTOMER SERVICE DEPARTMENT AT 1-800-222-4009

MONDAY - FRIDAY 8:00a.m - 6:00p.m ET

visit us on the web at www.meyda.com