


# INSTALLATION INSTRUCTIONS: APRON FRONT ASSEMBLY

## Please note:

- Review and abide by all building and plumbing codes.
- Miseno sinks need to be installed by a professional or skilled do-it-yourselfer.
- Evaluate your current or desired cabinetry. If you are building or remodeling a kitchen from scratch, you will be able to choose cabinets specifically made for farmhouse kitchen sinks. The importance of the cutout is the doors will be built according to the area needed for the sink chosen.
- Miseno recommends using the actual sink for any cuts as no template is available.
- Be careful when unpacking the sink. We advise setting it on the package it was received with.
- When cleaning up after installation, DO NOT USE ABRASIVE CLEANERS, as they may damage the finish on the copper. Use soft soap and warm water with a washcloth to clean the surface.

## STEPS TO COMPLETE YOUR APRON-FRONT SINK PROJECT

- **For layout**, center the sink and allow for faucets, handles and backsplashes. Outline the sink, as the guide, with a pencil, for the cut-out. Before cutting, decide what the edge reveal will be. Depending on the installation type, make proper cut-out in the countertop.
- **Create a custom support** using 2x4s which will adequately hold the weight of the sink from underneath.
- **Place the sink** on the top of cabinet or into the cabinet front cut-out. Apply silicone as a gasket between the sink and cabinet.
- **Make sure sink is leveled** from front to back as well as side-to-side.
- **Apply a bead** of silicone around top edge of sink. Make sure countertop is centered properly and place accordingly. Remove any excess silicone from any surface.
- **Install the drain** (not included) according to the drain's installation instructions.

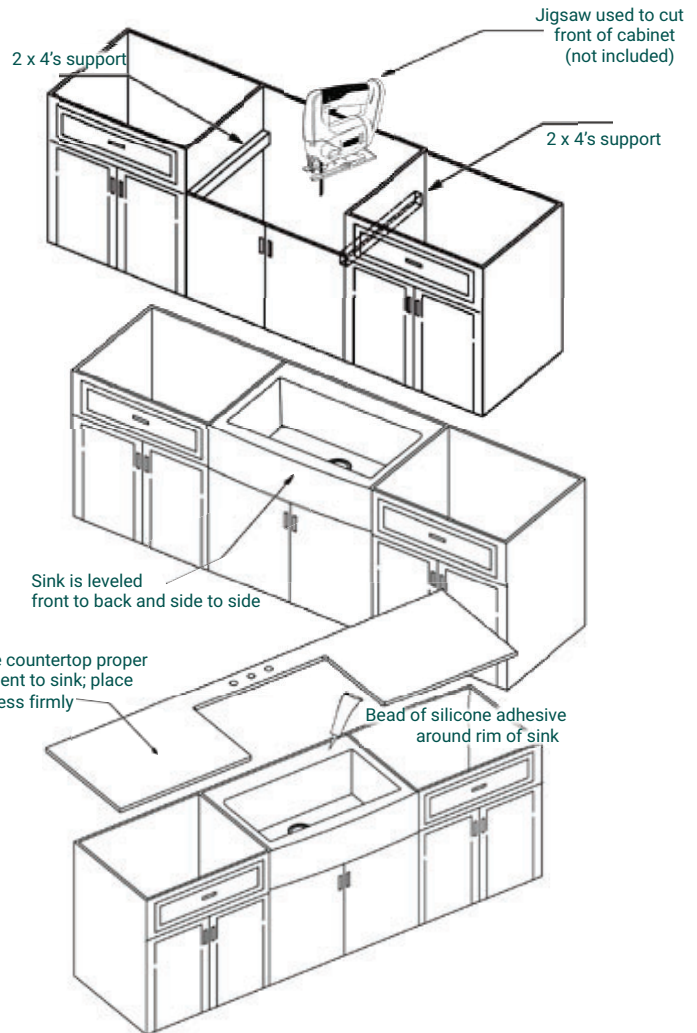

## TOOLS NEEDED FOR ASSEMBLY

Specialized tools may be necessary to install Miseno's Apron Front sink with countertop materials other than wood, marble, or granite.



Questions, problems, missing parts? Before returning to your retailer, call our customer service department at 855.480.2915, 7am-5pm PST, Monday-Friday, or email us at [infoservice@miseno.com](mailto:infoservice@miseno.com)

## TROUBLESHOOTING TIPS - APRON FRONT

<u>Issue</u>	<u>Reason</u>	<u>Solution</u>
Finish is changing color or is shiny	Abrasive cleaners, soaps or other factors constantly in contact with finish.	Stop using abrasives. Finish will heal over time.
There is a gap on the side	Sink wasn't installed level	Make sure your professional installer levels the sink perfectly
Sink seems to be sagging from countertop	Proper sink supports were not used	2 x 4s need to be built into the cabinet to support the weight