

Job Name:

System Reference:

Date:



Indoor Unit: MSZ-GL24NA-U1



Wireless Remote Controller

SPECIFICATIONS:**Rated Capacity***

Cooling ¹	Btu/h / W	22,400
Heating at 47° F ²	Btu/h / W	27,600

Rating Conditions per AHRI Standard:

¹ Cooling | Indoor: 80° F (27° C)DB / 67° F (19° C)WB; Outdoor: 95° F (35° C)DB / 75° F (24° C)WB² Heating at 47°F | Indoor: 70° F (21° C)DB / 60° F (16° C)WB; Outdoor: 47° F (8° C)DB / 43° F (6° C)WB

For data on specific indoor units (all ducted, all non-ducted, and both ducted and non-ducted) combinations, see the MXZ Technical and Service Manual.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

Electrical Power Requirements		208 / 230V, 1-Phase, 60 Hz	
Minimum Circuit Ampacity (MCA)		A	1
Blower Motor (ECM)		F.L.A.	0.76
Blower Motor Output		W	55
Field Drainpipe Size O.D.		In.(mm)	5/8 (15)
Airflow Rate (Quiet - Lo - Med - Hi - Super Hi)			
Cooling	DRY	CFM	388-469-544-628-738
	WET		347-420-487-562-661
Heating	DRY		388-469-544-628-738
Sound Pressure Level (Quiet - Lo - Med - Hi - Super Hi)			
Cooling	dB(A)	34-41-45-49-53	
Heating		32-41-45-49-52	
External Dimensions (H x W x D)		In.(mm)	12-13/16 x 43-5/16 x 9-3/8 (325 +17 x 1,100 x 238)
Net Weight		Lbs.(kg)	37 (17)
External Finish		Munsell 1.0Y 9.2 / 0.2	
Refrigerant Piping (Flared)			
Liquid (High Pressure)		In.(mm)	3/8 (9.52)
Gas (Low Pressure)			5/8 (15.88)

ACCESSORIES:**Indoor Unit**

- ☐ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- ☐ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- ☐ Anti-Allergy Enzyme Filter (MAC-408FT-E)
- ☐ Platinum Catalyst Deodorizing Filter (MAC-308FT-E)
- ☐ Drain Pan Level Sensor (DPLS2)



Controls

- ☐ Wireless Controller (MHK1)
- ☐ Wired Remote Controller PAR-31MAA (Requires MAC-333IF-E)
- ☐ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- ☐ Thermostat Interface (PAC-US444CN-1)

DIMENSIONS: MSZ-GL24NA-U1

MSZ-GL24NA-U1

Unit: in. (mm)

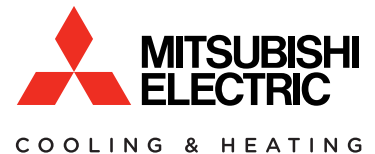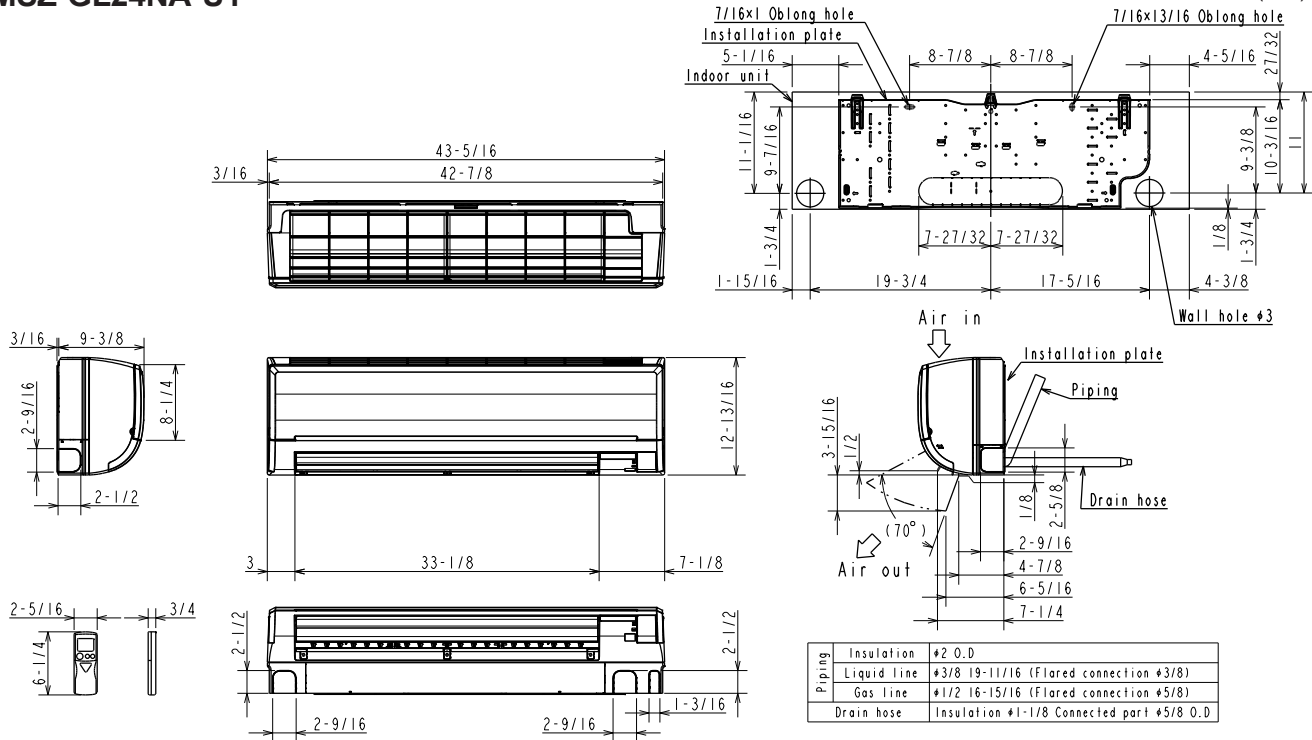

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com