
LEDGE - model: WS-14

LED Vanity/Sconce Luminiare



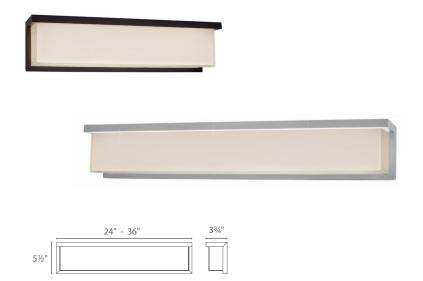

Fixture Type:	
Catalog Number:	
Project:	
Location:	

PRODUCT DESCRIPTION

A luminous architectural profile and superior construction make this sconce appropriate for transitional and contemporary interiors or exteriors. Mitered silk-screened glass encases a maximum number of LEDs engineered for optimal illumination. Two sizes allow for cohesive specifications across residential and commercial applications.

FEATURES

- ETL & cETL listed for damp locations
- ADA compliant, low profile design
- 277V option available special order
- Replaceable LED module
- 50,000 hour rated life
- Color Temp: 3000K 2700K / 3500K available special order
- CRI: 90

SPECIFICATIONS

Construction: Aluminum with white mitered glass.

Power: Transformer located in outlet box. 120V input.

Light Source: High output LED.

Dimming: Dims to 10% with an electronic low voltage (ELV) dimmer.

Mounting: Mounts directly to junction box. **Finish:** Brushed Aluminum (AL), Bronze (BZ) **Standards:** ETL & cETL listed. ADA compliant.

Model	Length	Watt	Voltage	LED Lumens	Delivered Lumens	Finis	h	
WS-1424 WS-1436	24" 36"	55W 91W	120V	2880 4566	1455 2235	AL BZ	Brushed Aluminum Bronze	

For 277V special order, add an "F" before the finish: **WS-W1436F-BZ** For 2700K add "-27"; 3500K add "-35" before the finish: **WS-W1424-35-AL**



Example: WS-1424-AL

modernforms.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 Central Distribution Center 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760