700-7005 Rectangular Shelf with Rail CORONADO 700 SERIES

PLEASE READ THESE INSTALLATION INSTRUCTIONS THOROUGHLY PRIOR TO INSTALLING THIS SHOWER SHELF

IMPORTANT: THIS PRODUCT SHOULD ONLY BE INSTALLED BY QUALIFIED AND TRAINED PERSONNEL


FAILURE TO FOLLOW THESE INSTRUCTIONS COULD LEAD TO IMPROPER INSTALLATION OF THE SHOWER SHELF, STRUCTURAL AND/OR WATER DAMAGE TO THE WALL AND IN-WALL SUPPORT STRUCTURES, AND/OR SERIOUS BODILY INJURY IN USE. IN ADDITION, ALL WARRANTIES, EXPRESS OR IMPLIED, WILL BE NULL & VOID DUE TO IMPROPER INSTALLATION OF THIS PRODUCT. SEACHROME CORPORATION DOES NOT ASSUME ANY LIABILITY FOR DAMAGE RESULTING FROM SERVICES PERFORMED BY OTHERS, OR FAULTY INSTALLATION, MISUSE OR MISAPPLICATION OF GOODS.

THE PERFORMANCE OF THIS PRODUCT IS SIGNIFICANTLY IMPACTED BY THE STRENGTH AND CONSTRUCTION OF THE WALL TO WHICH IT IS ATTACHED.

TO ASSURE PROPER AND SAFE INSTALLATION, THIS SHOWER SHELF <u>MUST</u> BE INSTALLED INTO A MINIMUM 2" THICK, SOLID WOOD, IN-WALL BACKING MATERIAL. MAKE CERTAIN IN-WALL BACKING COMPLIES WITH ALL LOCAL BUILDING CODE REQUIREMENTS.


DO NOT EXCEED 50 POUNDS OF FORCE IN USE OF THIS PRODUCT.

1. Remove the Rectangular Shower Shelf (700-7005 Series) from the shipping carton.

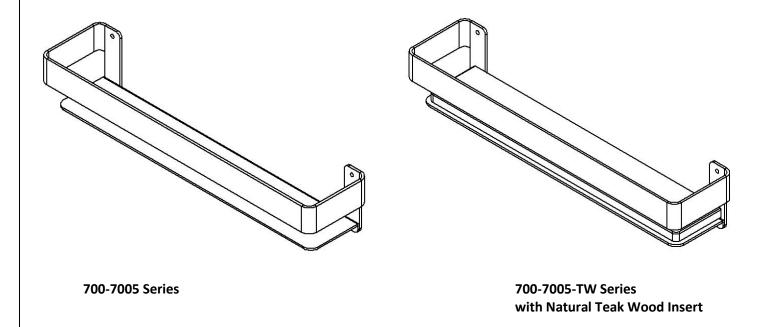

CORONADO 700 SERIES U.S. Patent No. D1,011,081 S

2. Locating the Rectangular Shower Shelf in the desired position.

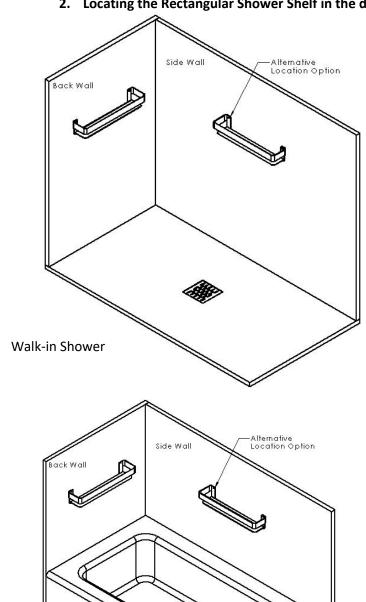

Locate and ensure the area where the shelf is to be mounted is reinforced with 2" solid wood in-wall backing.

Determine desired shelf height. Using the shelf as a template, align the hole centerlines with the 2" solid wood in-wall backing.

Mark the top center of the mounting hole slots with a marking pencil/pen.

It is *extremely important* you mark the center of each of the four (4) mounting holes precisely on the mounting surface.

Tub Enclosure

June 2022 **Updated February 2024**

CORONADO 700 SERIES U.S. Patent No. D1,011,081 S

700-7005 Rectangular Shelf with Rail CORONADO 700 SERIES

Proceed cautiously through the following steps in this installation process to avoid drilling into in-wall water supply lines.


All mounting points must fasten into structural wood backing, minimum 2" thickness.

Avoid electrical and/or plumbing behind the wall, and where possible drill through tile – not through grout.

3. Mounting the Rectangular Shower Shelf.

Step #1


Use a power drill with a 1/8" masonry or carbide drill bit (not provided) and drill at the four (4) locations marked on the wall into the 2" thick solid wood in-wall backing.

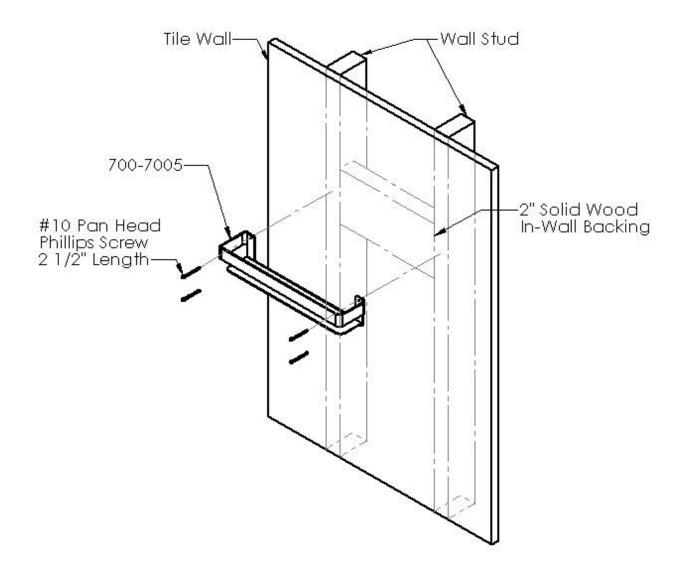

Step #2

Fill the holes on the mounting surface with silicone to ensure a water-tight seal will be created at all mounting locations. Secure the Shelf Mounting Bracket to the wall using the (4) #10 Pan Head Phillips sheet metal screws (provided) and screw INTO 2" THICK, SOLID WOOD IN-WALL BACKING MATERIAL.

Tighten screws completely after ALL (4) screws are in place.

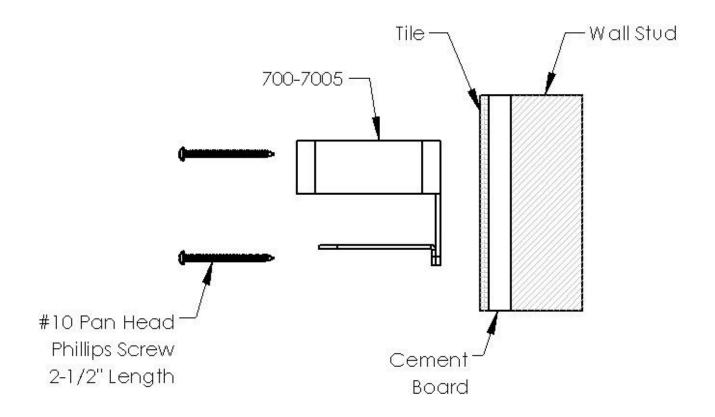

To ensure proper and safe installation, the shower shelf should not shift in any direction on the mounting surface.

Do NOT exceed 50 pounds of force in use of this product.

Hardware Provided: (4) #10 Pan Head Phillips sheet metal screws 2-1/2" length.

<u>Tools required</u>: Marking pencil/pen, level, power drill, 1/8" Carbide tip drill bit, silicone.

THIS COMPLETES THE INSTALLATION OF THIS SHOWER SHELF.