

30261,30262



Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED

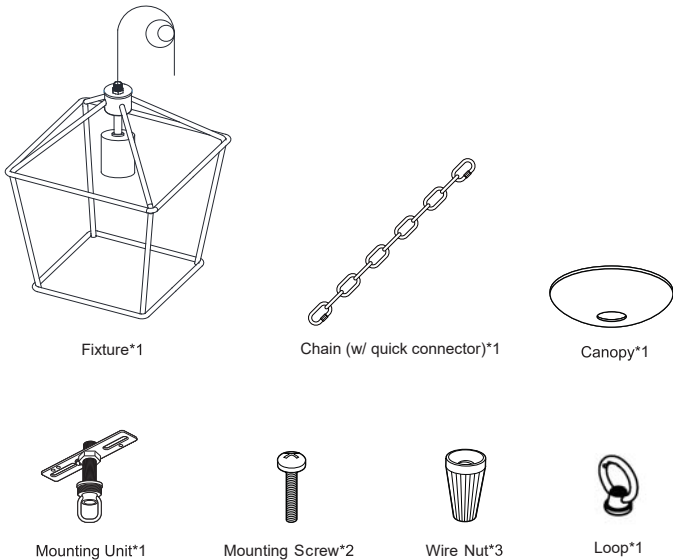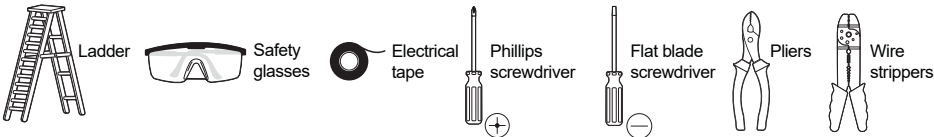


*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE

30261,30262

Assembly Instructions


STEP 1

Screw the loop to the top of the fixture.
Secure the chain to the loop on the fixture.

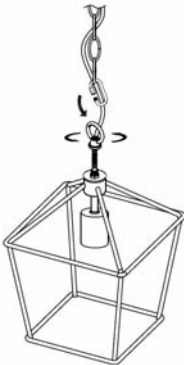

STEP 2

Attach the mounting unit to the junction box (not included) with the mounting screws and remove the preinstalled screw collar ring.
Place the canopy over the preinstalled screw collar loop on the mounting unit. Turn the screw collar ring until 1/2 of the screw collar loop threads are exposed.
Secure the chain to the screw collar loop on the mounting unit. Lower the screw collar ring and canopy over the chain.
Weave the electrical wires, ground wires through the chain, screw collar loop, canopy and through the center of the mounting unit.

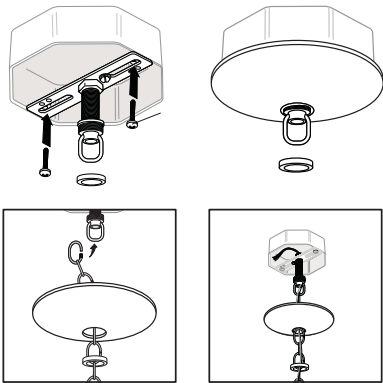

STEP 3




Make the electrical connection from the junction box to the fixture.
Connect the ground wire to the gossipping, using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts . Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor



STEP 4

Secure the canopy to the mounting unit with the screw collar ring.
Install E26*1*60W Bulb (not included).

