

PENDANT LIGHT (ROD)

Assembly Instructions

MODEL#:11661



CAUTION

•Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.

•Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver



Pliers




Wire strippers



Fixture




Canopy




Rods




Glass




Barrel sets



Mounting Unit



Mounting Screws



Wire Nuts



Lamp holder ring



screw



nut

*PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE


PENDANT LIGHT (ROD)

Assembly Instructions

MODEL#: 11661


STEP 1

Use the mounting screws to attach the mounting unit to the junction box




STEP 2

Screw the rods to the fixture. Make sure to feed the branchwires of the fixture through the rods during assembly. Remove or add rods to adjust the height.



Flush Mount

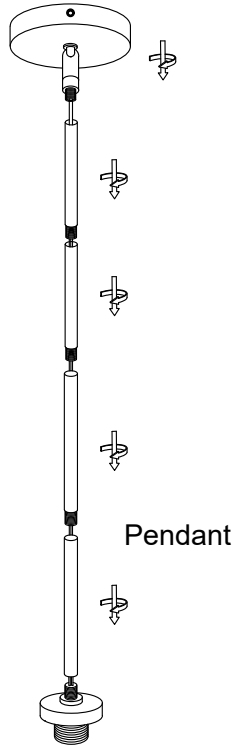

Pendant

STEP 3



Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape. Place the canopy on the mounting unit and secure the clamp with side screws.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.


Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor




STEP 4

Install the canopy on the mounting unit and tighten the side screws

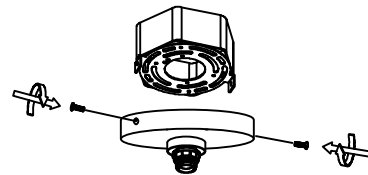

STEP 5

Put the lampshade into the lamp head, then put in the metal ring and the lamp head ring, and tighten it with a barrel.

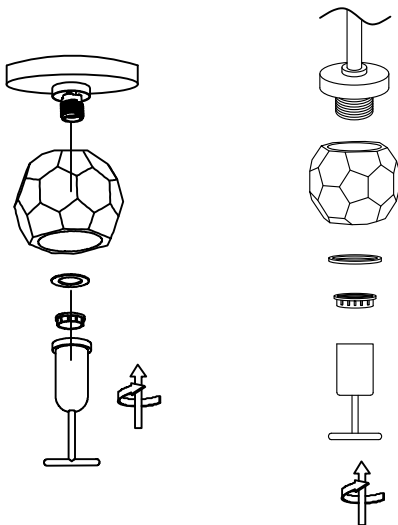

STEP 6

Finally install the G9 bulb

