

72030 & 72030-1

Assembly Instructions



CAUTION

- Inspect the wire insulation for any cuts, abrasions, or exposed copper that may have resulted during shipping. If there is a defect in the wire, do not attempt installation.
- Before starting installation of this fixture or removal of a previous fixture, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

TOOLS REQUIRED



Ladder



Safety glasses



Electrical tape




Phillips screwdriver




Flat blade screwdriver




Pliers



Wire strippers



Fixture*1




Glass shade*1




socket cup*1




socket ring*1



Long & short rod*2



canopy*1



Mounting Unit*1



Wire Nut*3



Mounting Screw*2



cap nut*2


***PARTS SHOWN MAY DIFFER SLIGHTLY PER LIGHT FIXTURE**

72030 & 72030-1

Assembly Instructions

STEP 1

Use the mounting screws to attach the mounting unit to the junction box.




STEP 2

Screw the long rods to the top of the fixture. Then screw in the short rods. Make sure to feed the branch wires through the rods during assembly.

Secure the rod assembly to the canopy.

Secure the glass shade to the fixture with the socket cup and socket ring.



STEP 3




Make the electrical connection from the junction box to the fixture. Connect the ground wire to the mounting unit using the preinstalled green ground screw. Then, connect the positive, negative and ground wires with the supplied wire nuts. Secure with electrical tape.

Connect Clear, Brown, Gold or Black Parallel Wire without tracer (round & smooth) or Black Fixture Wire to:

Black or Red Supply Wire or Insulated Wire (other than green) with copper conductor.

Connect Clear, Brown, Gold or Black *Parallel Wire with tracer (square & ridged) or White Fixture Wire to:

White Supply Wire or Insulated Wire (other than green) with silver conductor

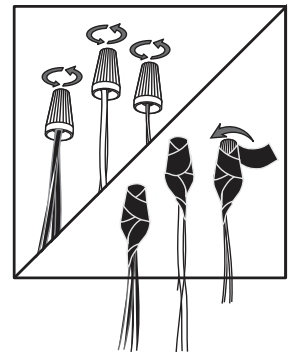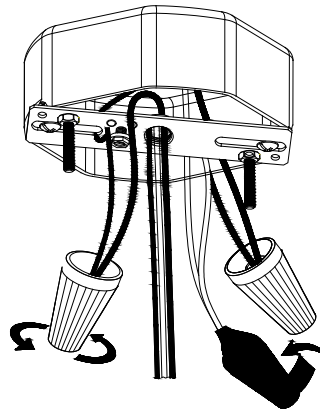

STEP 4

Place the fixture over the mounting unit and secure with the cap nut.

Install E26*1*100W MAX Bulb (not included).

