

# CROFTON SMALL & MEDIUM PENDANTS

DJP1261; DJP1271

## General Product Information



Product Warranty



FCC Statement

## Suggested/Required Tools



## Safety Information

### CAUTION-RISK OF FIRE


This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


USE MINIMUM 90°C SUPPLY CONDUCTORS.



Turn off electrical current at the source before working with any lighting fixture or portable lamp.

Install and use this product in adherence with local electrical codes and regulations.

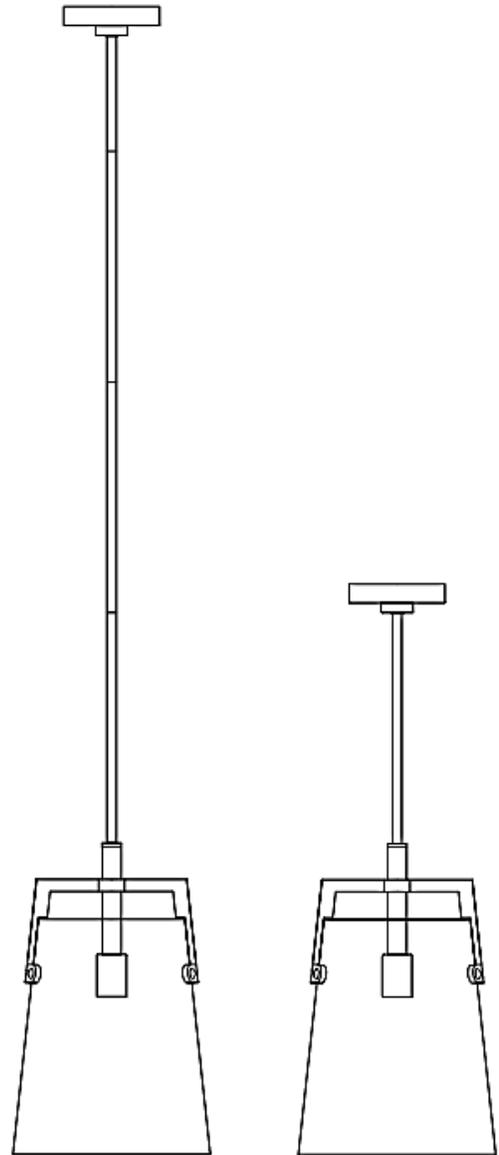

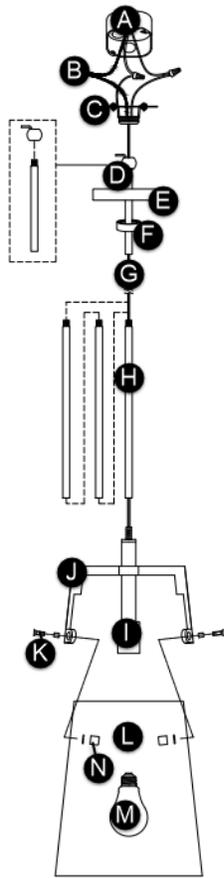

## FIXTURE PARTS

- A. Junction Box
- B. Wire Nut Connections
- C. Mounting Plate with Screw Collar & Mounting Screws (Not Illustrated)
- D. Half Ball Assembly
- E. Canopy
- F. Collar Nut
- G. Fixture Cord/Wires
- H. Stem Assembly
- I. Socket
- J. Shade Bracket
- K. Bracket/Shade Screws
- L. Shade
- M. Bulb (Not Included)
- N. Cap Nuts

## INSTRUCTIONS

### I. Preparing the Fixture

1. Carefully unbox and examine all the items included in the packaging of the fixture.
2. Locate the mounting plate with screw collar and secure it to the junction box using the mounting screws.
3. Determine the desired height of the fixture and complete the stem assembly accordingly by screwing the stems together.
4. Feed the fixture wires through the stem assembly, collar nut, canopy, and half ball assembly.
5. Secure the stem assembly on top of the fixture.
6. Lift the fixture stem and slide the half ball assembly onto the screw collar portion of the mounting plate.

### II. Wiring the Fixture

1. Safety first! Locate the circuit breaker and switch it off to cut off the power supply to the relevant circuits to ensure there's no electricity running through the wiring.
2. In accordance with local electrical codes, connect the fixture ground wire (bare copper or silver wire) to suitable ground. This may be a green ground screw on the mounting plate, which the ground wire should be tightly wrapped around or a house wire (green or bare copper wire without insulation).
3. Twist the bare ends of the following pairs of wires together using a wire nut to secure a connection:
  - a) Hot fixture wire (black) to hot power line wire
  - b) Neutral fixture wire (white) to neutral power line wire
4. Carefully tuck all the wires behind the mounting plate into the junction box.

### III. Installing the Fixture

1. Place the canopy onto the mounting plate with screw collar and secure it in place by screwing the collar nut tightly onto it.
2. Install the shade over the shade bracket and secure it with the shade screws and cap nuts.
3. Install the bulb to finish. Refer to label on socket for max wattage information.