

U.S. Government


Federal law prohibits removal of this label before consumer purchase.

ENERGYGUIDE

Clothes Washer
Capacity Class: Compact

Whirlpool Corporation
Model WTW2000H*
Capacity (tub volume): 1.6 cubic feet

Compare **ONLY** to other labels with yellow numbers.
Labels with yellow numbers are based on the same test procedures.

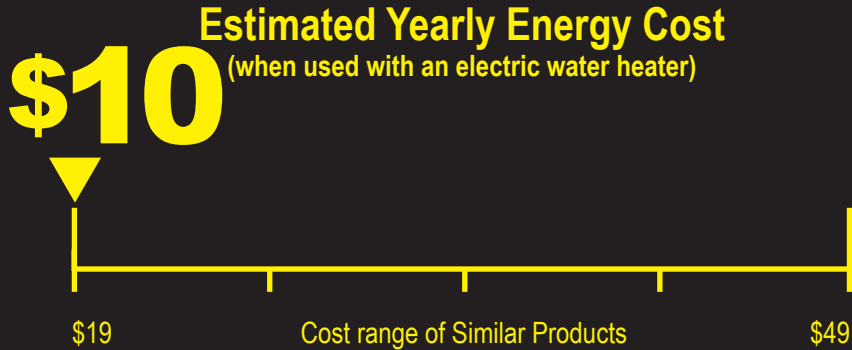

100 kWh
Estimated Yearly Electricity Use

\$6
Estimated Yearly Energy Cost
(when used with a natural gas water heater)

- Your cost will depend on your utility rates and use.
- Cost range based only on standard capacity models.
- Estimated operating cost based on six wash loads a week and a national average electricity cost of 12 cents per kWh and natural gas cost of \$1.09 per therm.



120-Volt Electric Compact Dryer


PRODUCT MODEL NUMBERS

LDR3822P

Electrical: 120-volt, 60-Hz, AC-only, 15- or 20-amp. electrical supply. A time-delay fuse or circuit breaker is recommended. Use a separate electrical circuit.

Exhaust venting: Exhaust your dryer to the outside. Four-inch diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vent. Exhaust outlet hood must be at least 12 inches from the ground or any object that may be in the path of the exhaust.

OVERALL DIMENSIONS

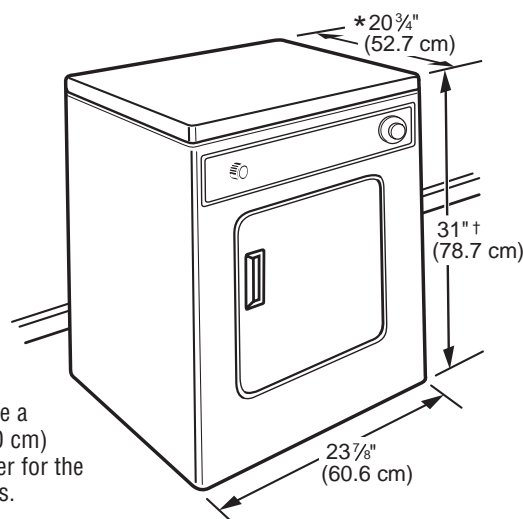


*Most installations require a minimum 5-1/2 in. (14.0 cm) clearance behind the dryer for the exhaust vent with elbows.

†Height with caster is 32 1/2" (82.6 cm)

RECESSED AREA AND CLOSET INSTALLATION

Recessed or closet installation - Dryer only

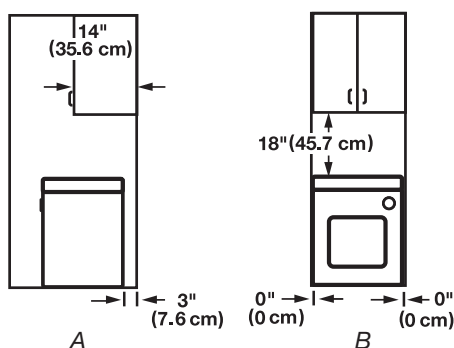


A. Side view - closet or confined area
B. Recessed area

Closet confined area


For closet installation with a door, minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent air openings are acceptable.

Recessed or closet installation - Stacked

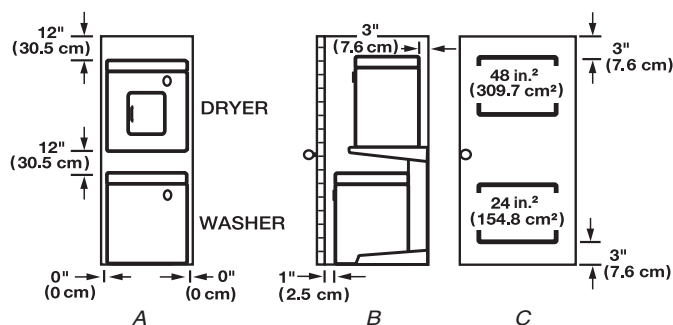

A. Recessed area
B. Side view - closet or confined area
C. Closet door with vents

EXHAUST VENTING

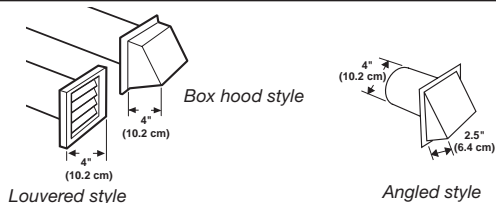

1. Select the route that will provide the straightest and most direct path outdoors. Plan the installation to use the fewest number of elbows and turns. When using elbows or making turns, allow as much room as possible. Bend vent gradually to avoid kinking. Avoid 90° turns when possible.

2. Determine vent length.

The maximum length of the exhaust system depends upon:

- The type of vent (rigid metal or flexible metal).
- The number of elbows used.
- Type of hood.

See the exhaust vent length chart that matches your hood type for the maximum vent lengths you can use.

3. Determine the number of elbows you will need.

IMPORTANT: Do not use vent runs longer than specified in the Vent Length Chart. In the column listing the type of metal vent you are using (rigid metal or flexible metal), find the maximum length of metal vent on the same line as the number of elbows.