



ACT™


	INTERNAL BLOWER STANDARD	INTERNAL BLOWER with ACT™ AIRFLOW CONTROL TECHNOLOGY™*	
Min. - Max. CFM	350 - 1,200	350 - 590	350 - 390
Min. - Max. Sones	2 - 9	*AIRFLOW CONTROL TECHNOLOGY™ (ACT™) is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.	

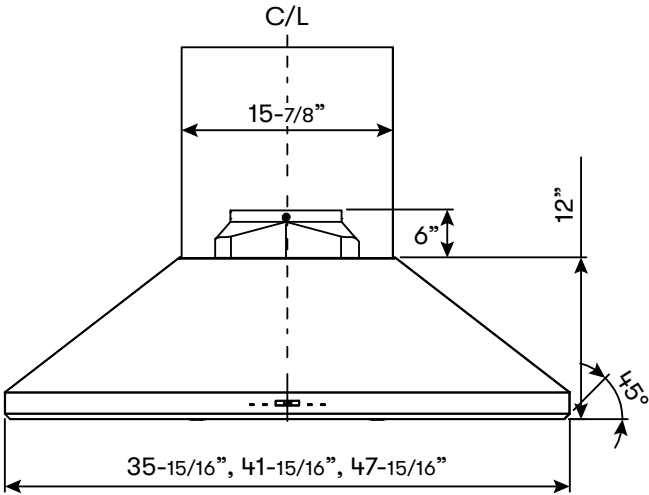

FRONT

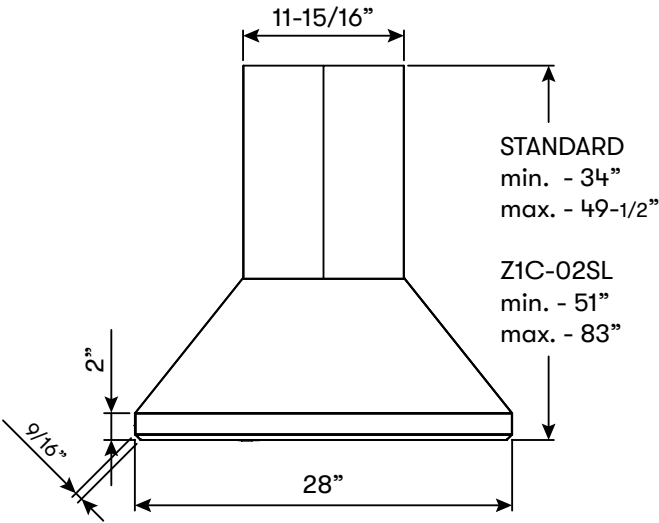

SIDE

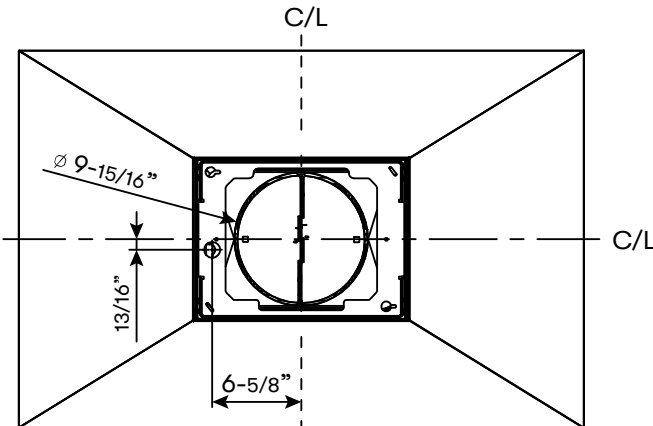

TOP

MODEL

Stainless Steel
SizeZSL-E36DS
36"ZSL-E42DS
42"ZSL-E48DS
48"

BLOWER PERFORMANCE

Blower CFM (Min. - Max.)

350 - 1,200

350 - 1,200

350 - 1,200

Sones (Min. - Max.)

2 - 9

2 - 9

2 - 9

ACT 590 CFM (Min. - Max.)

350 - 590

350 - 590

350 - 590

ACT 390 CFM (Min. - Max.)

350 - 390

350 - 390

350 - 390

FEATURES

ACT™ Technology

590, 390

590, 390

590, 390

Controls

ICON Touch® LCD

ICON Touch® LCD

ICON Touch® LCD

Speed Levels

5*

5*

5*

Auto Delay-Off

Yes

Yes

Yes

Lighting

LumiLight LED with
TruHue™, 6W x4LumiLight LED with
TruHue™, 6W x4LumiLight LED with
TruHue™, 6W x4

Dual-Level Lighting

Yes

Yes

Yes

TruHue™

Yes

Yes

Yes

Filters

Hybrid Baffles x2

Hybrid Baffles x2

Hybrid Baffles x3

Recirculating Option

No

No

No

Quick-Lock Installation System

Yes

Yes

Yes

Magnetic Duct Covers

Yes

Yes

Yes

Extension Duct Cover Option

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

Yes, Up to 12' Ceiling

ADA Compliant

Yes, w/ remote accessory

Yes, w/ remote accessory

Yes, w/ remote accessory

DUCT SPECIFICATIONS

Vertical Internal Blower

10" Round

10" Round

10" Round

Horizontal Internal Blower

NA

NA

NA

AC POWER

120V, 60Hz at Max. 9A

120V, 60Hz at Max. 9A

120V, 60Hz at Max. 9A

OPTIONAL ACCESSORIES

Wireless Remote Control Kit

RC-0002

RC-0002

RC-0002

Extension Duct Cover

Z1C-02SL

Z1C-02SL

Z1C-02SL

Make-Up Air Kit

MUA010A

MUA010A

MUA010A

MOUNTING HEIGHT RANGE**

24" - 34"

24" - 34"

24" - 34"

WARRANTY

3 years parts, 1 year labor

3 years parts, 1 year labor

3 years parts, 1 year labor

CEILING HEIGHT		8'	8.5'	9'	9.5'	10'	10.5'	11'	12'
STANDARD DUCT COVER	Ducted Mounting Height*	24" - 27.5"	24" - 33.5"	24" - 34"	29.5" - 34"	NA	NA	NA	NA
EXTENSION DUCT COVER	Ducted Mounting Height*	NA	NA	NA	24" - 29"	24" - 34"	24" - 34"	24" - 34"	27" - 34"

*When ACT™ is enabled the maximum speed levels will change. ACT 590 CFM = 3 speeds and ACT 390 CFM = 2 speeds.

**Mounting height refers to distance between top of a 36" tall cooking surface and bottom of hood.



TruHue™

A bright idea: customize your hood's light to harmonize with the rest of your kitchen's lighting at the touch of a button—from 2700K, 3000K, 3500K, 4000K to 5000K.



Airflow Control Technology™ (ACT™)

is an exclusive feature built into specific Zephyr hoods which can limit the maximum blower CFM to meet local code requirements.