




Z1321

ECOLOTRON CERAMIC DISC WALL HYDRANT Exposed, Non-Freeze, Anti-Siphon, Automatic Draining

SPECIFICATION SHEET

TAG _____

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

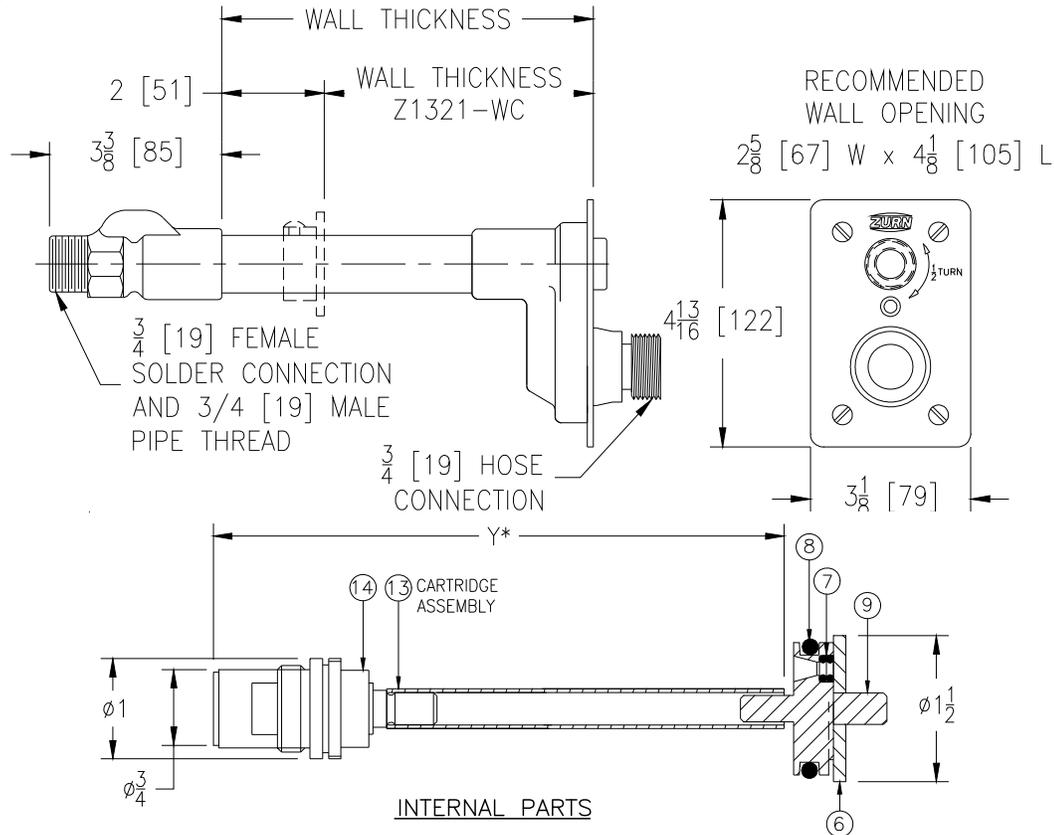

| Wall Thickness Inches | Approx. Wt. Lbs. [kg] |
|------------------------|-----------------------|
| 4-6-8 [102-152-203] | 3 [1] |
| 10-12-14 [254-305-356] | 6 [3] |
| 16-18 [406-457] | 5 [2] |
| 20-22-24 [508-559-610] | 6 [3] |

ENGINEERING SPECIFICATION: ZURN Z1321 Exposed Ecolotrol "anti-siphon" automatic draining wall hydrant. Complete with integral backflow preventer, copper casing, all bronze interior parts with 1/2 turn ceramic disk cartridge and combination 3/4[19] female solder and 3/4[19] male pipe thread inlet. Stainless steel face with operating key lock. (All solder connections are lead free.)

OPTIONS (Check/specify appropriate options)

SUFFIXES

- ___ -PB Polished Bronze Face
- ___ -RK Hydrant Parts Repair Kit
- ___ -RT12 Ceramic Cartridge Removal Tool (Up to 12 [305] Wall)
- ___ -RT24 Ceramic Cartridge Removal Tool (Up to 24 [610] Wall)
- ___ -RT36 Ceramic Cartridge Removal Tool (Up to 36 [915] Wall)
- ___ -WC Wall Clamp
- ___ -34EL 3/4 [19] 90° Solder Inlet Elbow
- ___ -34FIP 3/4 [19] IP Straight Female Inlet Adapter

PARTS LIST

| Item | Name | Quan. |
|------|--------------------|-------|
| 14 | Cartridge | 1 |
| 13 | Operating Tube | 1 |
| 9 | Operating Coupling | 1 |
| 8 | 'O' Ring | 1 |
| 7 | 'O' Ring | 2 |
| 6 | Retaining Washer | 1 |

*WHEN ORDERING REPLACEMENT CARTRIDGE ASSEMBLY SPECIFY Y DIM.

REV. F DATE: 03/23/09 C.N. NO. 99839

DWG. NO. 58872 PRODUCT NO. Z1321