



WIDESPREAD


**Z831R1-XL
TAG**

Engineering Specifications: Zurn AquaSpec® Z831R1-XL

Polished chrome-plated widespread with adjustable centers from 6" [152mm] to 20" [508mm], a 5" [127mm] centerline cast brass low profile spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 2-1/2" [64mm] vandal-resistant color-coded metal lever handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/8" [29mm] thick.




Zurn Lead Free products (-XL), is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with state laws and local codes that mandate lead content levels. Zurn Lead Free products (-XL) are manufactured with less than one quarter of one percent (0.25%) total lead content by weighted average.

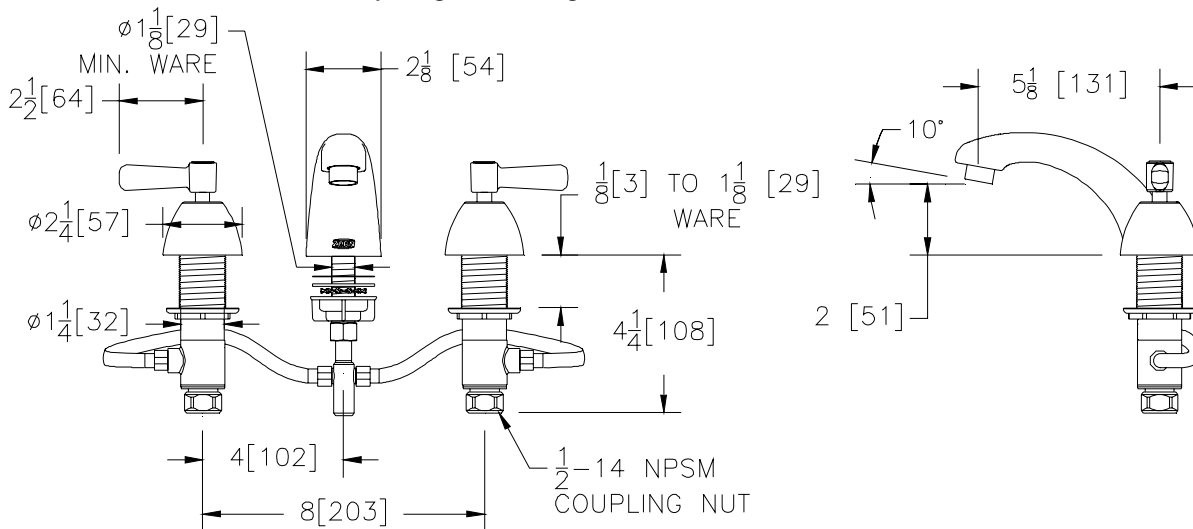

Note: All dimensions are for reference only. Do not use for pre-plumbing

OPTIONAL ACCESSORIES

| Suffix | Description |
|----------|---|
| ___ -CWO | Cold Water Only |
| ___ -G | 1-1/4" [32mm] Grid Strainer Drain |
| ___ -HCT | Hot/Cold Text Indexes |
| ___ -ICT | Inter-connecting Copper Supply Tubes for 8" In-line Centers |
| ___ -PT | 1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend |
| ___ -2M | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Aerator |
| ___ -3M | 0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Male Aerator |
| ___ -4M | 2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Male Laminar Flow |
| ___ -7M | 1.0 GPM [3.8L] Pressure Compensating Male Spray Outlet |
| ___ -16M | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Male Spray Outlet |
| ___ -17M | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Male Aerator |
| ___ -18M | 1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Male Laminar Flow |
| ___ -19M | 1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Male Laminar Flow Outlet |
| ___ -20M | 1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Anti-Microbial Male Laminar Flow Outlet |
| ___ -21M | 1.0 GPM [3.8L] Male Laminar Flow Outlet |
| ___ -22M | 1.0 GPM [3.8L] Vandal-Resistant Male Laminar Flow Outlet |



ZURN INDUSTRIES, LLC ♦ COMMERCIAL BRASS OPERATION ♦ 2640 SOUTH WORK STREET ♦ FALCONER NY 14733

Phone: 1-716-665-1132 ♦ Fax: 1-716-665-1135 ♦ World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED ♦ 3544 Nashua Drive ♦ Mississauga, Ontario L4V1L2 ♦ Phone: 905/405-8272 Fax: 905/405-1292