TOTO[®]

CST424SF

Promenade 1.6 GPF Toilet, Elongated



CST424SF - Promenade Toilet SS114 - SoftClose Seat



G-Max[™] Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose toilet seat, or upgrade to a Washlet™.



Choose a SoftClose® Fast Flush: New, wide 3" flush valve is 125% toilet seat, or larger than conventional 2" flush valves.

- Traditional design with stately lines
- Powerful and quiet flush
- Promenade design suite:
 Matching pedestal and self-rimming lavatories
- Large water surface
- Universal Height

High profile, elongated, close coupled toilet. Low consumption (1.6 Gpf/6.0 Lpf) gravity flushing action.

Tank cover, fittings, chrome plated trip lever less seat.

CST424SF

Elongated, 12" rough-in, less seat.

□ C424EF

Elongated front bowl only, 12" rough-in.

☐ ST423S

Promenade tank and cover only. Complete with tank trim and coupling components.

□ SS114

SoftClose: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.



Colors:

Standard #01 Cotton, #11 Colonial White,

#12 Sedona Beige, #03 Bone,

#04 Gray, & #51 Ebony

Optional See price book for additional colors

Trip Lever:

Standard #CP Chrome Plated Optional See price book for additional finishes

Promenade 1.6 GPF Toilet, Elongated

■ PERFORMANCE

The TOTO 1.6 GPF toilet scored the highest possible rating in independent laboratory performance tests. With a powerful and quiet flush design, the toilet also offers a large water surface.Promenade toilets are designed to match the Promenade Lavatory Suite.

■ SPECIFICATIONS

Water Use: 1.6 Gpf / 6.0 Lpf Flush System: Gravity Feed

Min. Water Pressure: 8 psi

Water Surface: 8-7/8" x 6-3/8"

Trap Diameter: 2-1/8"
Rough-in: 12" rough in
Trap Seal: 2-1/4"

Material: Vitreous china

Warranty: Five Year Limited Warranty

Shipping Weight: C424EF - Bowl 59 lbs.

ST423S - Tank 41.5 lbs.

Shipping Dimensions:

C424EF - Bowl

28"L x 10"W1 x 16-1/4"W2 x 17-1/4"H

ST423S - Tank


18-7/8"L x 8-5/8"W x 18-1/8"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/UPC, CSA, City of Los Angeles, State of MA, and others

Meets the American Disabilities Act Guidelines and ANSI A117.1

These dimensions and specifications are subject to change without notice.

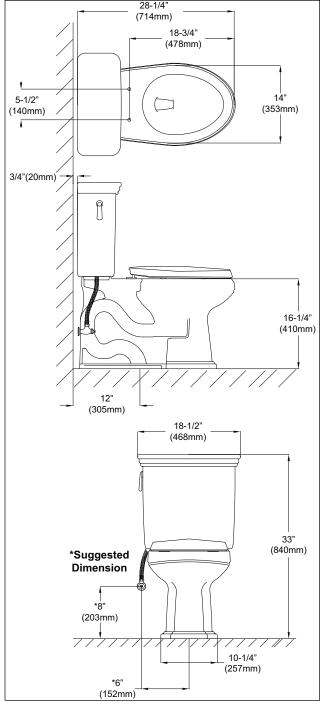

CST424SF - Promenade Toilet



TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260 Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com Printed in U.S.A. © TOTO LTD. 01/08